


Laserliner®

CenterScanner Plus



Professional drill guide for reliable determination of entry and exit points of wall and ceiling drill holes

Rev.1216

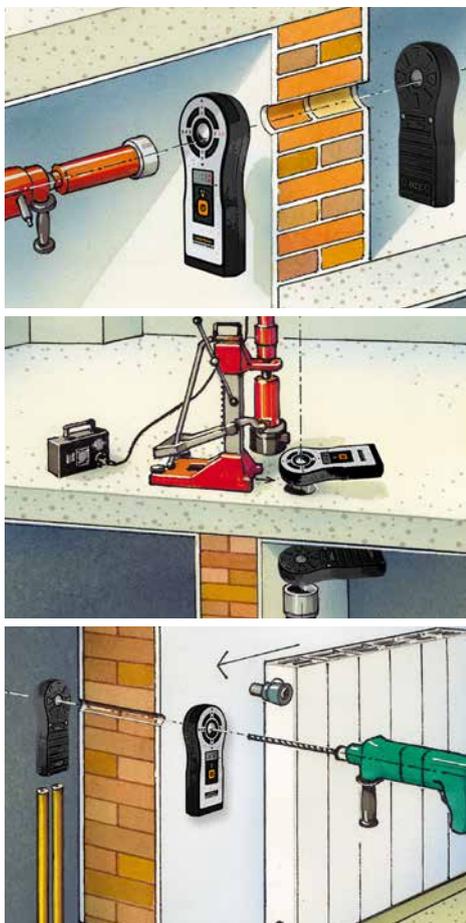

- System consisting of a transmitter and a receiver enables **easy drill channel alignment**
- **Clearly visible LED indicators** enable precise localization of entry and exit positions
- Easily **accessible marking aids** in the transmitter and receiver **for centring**
- Integrated display can be used **to determine the required drilling depth** up to 200 cm
- TX transmitter with **integrated metal and voltage detection up to 150 cm** to prevent misplaced holes
- **Visual and acoustic warning** when foreign objects are detected

TECHNICAL DATA

CENTERSCANNER PLUS REC V

INDICATORS 13 LEDs, acoustic warning signal
LED DISPLAY 3 x 7 segment
MEASURING DEPTH up to 150 cm for position detection up to 200 cm for depth display
ACCURACY typical 3% of measuring depth
OPERATING TIME approx. 20h
OPERATING CONDITIONS -30°C ... 40°C, humidity < 80%, no condensation
STORAGE CONDITIONS -40°C ... 60°C, humidity < 80%, no condensation
POWER SUPPLY 3 x 1,5 V alkaline batteries (type AAA)
DIMENSIONS (W x H x D) 75 x 172 x 28 mm
WEIGHT (incl. batteries) 210 g
CENTERSCANNER PLUS TX
INDICATORS 11 LEDs, acoustic warning signal
OPERATING TIME approx. 12h
OPERATING CONDITIONS -30°C ... 40°C, humidity < 80%, no condensation
STORAGE CONDITIONS -40°C ... 60°C, humidity < 80%, no condensation
POWER SUPPLY 3 x 1,5 V alkaline batteries (type AAA)
DIMENSIONS (W x H x D) 75 x 172 x 28 mm
WEIGHT (incl. batteries) 200 g



Clearly visible LED indicators

Easily accessible marking aids

Integrated LCD display



CenterScanner Plus

- inclusive carrying case
- + CenterScanner Plus REC V
- + CenterScanner Plus TX
- + Batteries
- + Adhesive kit
- + Sliding pads (4x)

Packing dimension (W x H x D)

ARTICLE	ARTICLE NO	EAN-CODE	PU
CenterScanner Plus	075.300A	4 021563 699926	5

